

WS Tri-Stand



Features

- ·1½" (28.6 mm) square box section construction
- · 1200 kg load capacity
- · Choice of fixed base or folding leg
- \cdot Suitable for pipe sizes from **1-24"**
- · Weight: 7,6 kg
- · Folding legs allow for easy storage and transportation
- · Comprehensive range of nine different head types
- · Adjustable in height from **69-122 cm**
- · Independently load tested
- · CE rated



Non-folding option



V-head (Large option available)



Roller-heads (Available in steel and nylon)



Slip-on style heads (Requires V-head)

Name	WS Folding tri-stand, base	WS Tri-stand, base	Roller head	Roller head SS	Roller head nylon	Bar stock head
Image						
Part number	tfs301	tps300	swh350	swh350ss	nwh350	rbh300
Capacity	1200 kg	1200 kg	1000 kg	1000 kg	450 kg	1000 kg
Weight	7,6 kg	7,6 kg	4,4 kg	4,4 kg	2,9 kg	3,9 kg
Pipe Sizes	1-24"*	1-24"*	1-24"	1-24"	1-24"	10"** *with head **roll width
Name	V-head	Slip-on head	Slip-on head SS	Slip-on head Nylon	Slip-on covers SS	Slip-on ball transfer head (SS)
Image						
Part number	tvh300	swh300	swh300ss	nwh300	ssh300	bth300(ss)
Capacity	1200 kg	450 kg	450 kg	450 kg	1000 kg	450 kg
Weight	3,2 kg	3,8 kg	3,8 kg	2 kg	1,2 kg	2,4 kg
Pipe Sizes	up to 12"	1-12"	1-12"	1-12"	1-12"	1-12"




WS Duo Stand



Features

- · 2400 kg load capacity
- · Folding legs for ease of transport and storage
- · Self centering roller adjustment from either sides
- · Height adjustable 74-109 cm
- · Pipe diameter capacity 1/2-48"
- · Height leveling from either side of the stand
- · Wheels trued for true pipe rotation
- · Bronze bearing to eliminate arcing
- · Brake to lock loads for layout or fit-up
- · Uses Quick Change Housings
- · CE rated







Roller heads available

The WS stands with Quick-change style heads are designed for large diameter pipe rotation and feeding. With lock brakes on the wheels to secure the load or marking layout or fit-up. Now supplied with folding legs as standard for ease of use and transport.

The Quick Change style roller housings increase the versatility of the duo stand. Roller housings can be changed in a matter of seconds, without tools, to adapt to almost any applications. Roller wheels are available in either steel, stainless steel or nylon. Ball transfer heads suitable for carbon or stainless steel pipes are also available.

Name	WS Duo stand, base	Wheel head	Wheel head SS	Wheel head Nylon	Ball transfer head (SS)
Image		0-3-6-0			
Part number	dps200	swh200	swh200ss	nwh200	bth200(ss)
Capacity	2400 kg	2400 kg	2400 kg	450 kg	1450 kg
Weight	19,5 kg	3,6 kg	3,4 kg	2,7 kg	2,65 kg
Pipe Sizes	0,5-48"*	0,5-48"	0,5-48"	0,5-48"	0,5-48"



WS Quattro Stand




The Quattro Heavy Duty Pipe Stand is the ideal solution for heavy duty pipe handling, in the workshop or for site applications. The large V-head, heavy duty base and variety of head options make the Quattro the most durable and versatile pipe stand on the market. The Quattro stand can be used as a simple jack stand, supplied as standard with levelling pads to accommodate uneven working surfaces. Weight load tested to 1200 kg per stand.

The Quattro stands can also be supplied with lockable castor wheels so pipes of up to 36" diameter and any length can be moved around a workshop or site, without using a crane or forklift.

Name	WS Quattro stand, base	Large V-head	Wheels for large V-head	Wheels for large V-head SS	Wheels for large V-head Nylon	Wheels for WS Quattro stand base
Image					No.	000
Part number	qps400	qvh400	swh400	swh400ss	nwh400	rwk400
Capacity	1200 kg	1200 kg	1200 kg	1200 kg	450 kg	1200 kg
Weight	10 kg	8,5 kg	3 kg	3 kg	1,8 kg	11 kg
Pipe Sizes	1-36"*	1-36"	1-36"	1-36"	1-36"	N/A *with head



Quick-change roller stand

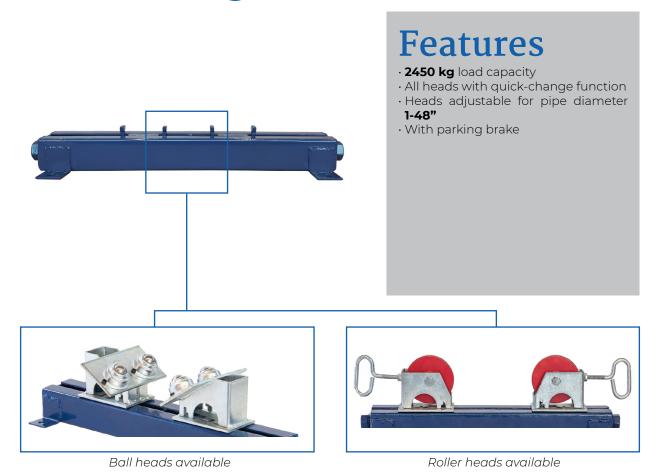

The Quick Change style roller housings increase the versatility of the Quick-change Roller Stand. Roller housings can be changed in a matter of seconds, without tools, to adapt to almost any applications. Roller wheels are available in either steel, stainless steel or nylon. Ball transfer heads suitable for carbon or stainless steel pipes are also available.

Name	Quick-change roller stand, base	Wheel head	Wheel head SS	Wheel head Nylon	Ball transfer head (SS)
lmage		0-6-0	0-0-0-0	0-0-0	
Part number	qcr501	swh200/501	swh200/501ss	nwh200/501	bth200/501(ss)
Capacity	2450 kg	2450 kg	2450 kg	450 kg	1450 kg
Weight	5,9 kg	3,8 kg	3,8 kg	2,2 kg	3 kg
Pipe Sizes	1-48"*	1-48"	1-48"	1-48"	1-48" *with head